

D-Step™ Mats

Cleaning Instructions

D-Step™ Mats remove over 98% of contamination from the bottom of shoes and carts. The dust is held by the permanently adhesive vinyl surface until it is cleaned. Cleaning recovers the dust and regenerates the adhesiveness of the mat surface.

Clean **D-Step™ Mats** at least once per day. Clean more frequently when heavy traffic creates a noticeable reduction in the surface's adhesiveness.




D-Step™ Mats remove dust from shoes in three easy steps.

Mat cleaning supplies:

# MKT2	A - Cleaning pad holder (1) B - Scrub pads (4) C - 61" handles (2) D - 18" Rubber squeegee (1)
# 3102ES	E - D-Lead® Equipment & All Purpose Cleaner

D-Lead® is a registered trademark of ESCA Tech, Inc.

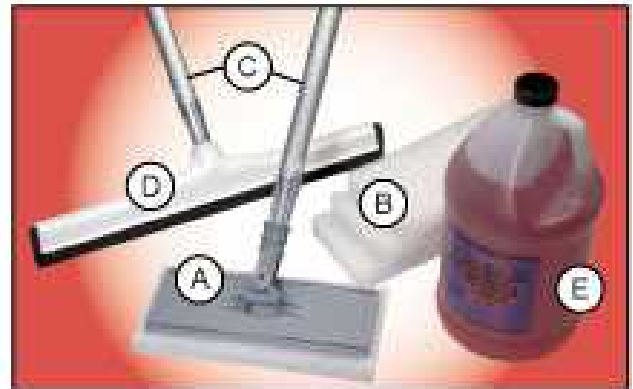

Step 1: Dilute 1 part D-Lead® Equipment Cleaner with 5-10 parts water.



Step 2: Apply diluted liquid cleaner sparingly on the mat. Do not create pools or puddles.



Step 3: Scrub, using short, firm, even strokes.



Step 4: Remove liquid cleaner with rubber squeegee.

Step 5: Use mop or wet vacuum to recover liquid cleaner around the edge of the mat.

Step 6: If the mat is heavily contaminated, repeat steps 2-5.

Step 7: After every fourth cleaning, rinse the D-Step™ Mat with clean, warm water.

Warning: Mats are slippery when wet!

ESCA TECH, INC.
Contamination Control Systems & Solutions

3747 N. Booth Street
Phone: 414-962-5323
E-mail: cservice@esca-tech.com

Milwaukee, WI 53212
Fax: 414-962-7003
www.esca-tech.com

INSTALLATION

Location

Select a smooth, level surface between the dirty area and the clean area you wish to protect. Place the mat where foot and wheel traffic will cross the mat.

Surface Preparation

1. Thoroughly clean the surface.
2. Mop the surface and allow to dry.
3. Remove wax, if any, from the floor.
4. The surface should be smooth.

Installation

1. Unroll mat on the floor with the white paper facing down. Allow mat to relax.
2. Peel off the yellow liner covering the adhesive strips (reorder #: TAPE - 001).
3. Turn the mat over and position it in the desired location.
4. Use the core roll and work across the mat from one end to firmly secure the mat in place. Rolling the core across the mat will eliminate any air pockets. On small mats, no core roll is provided. Air pockets can be eliminated and the mat secured in place by hand.
5. Starting at one end, peel the white paper covering off the mat.

Forktrucks

Do not turn forklift truck wheels while on the mat. This will cause mat to tear.

Cleaning

Do not clean the D-Step™ Mat with solvents, acids, alkalies, bleach or adhesives.

Disposal

D-Step™ Mats are 100% recyclable vinyl. Call us to arrange recycling.

To Repair Tear

If mat should tear from abnormal use, it can be repaired with Mannington Vinyl Floor Sealer, or Crazy Glue.

To Repair Edging

If edging becomes separated from the mat, clean the edges then glue with Crazy Glue.

Carbon Black

Carbon black or graphite may build up on the mat. This build up will reduce the adhesiveness of the mat. If this occurs, call ESCA Tech to order Formula 9 Cleaner (4490ES) to remove the carbon black and restore the adhesiveness.



Partially cleaned gray mat contaminated with carbon black.

© 2003 XI-IV

ESCA TECH, INC.

Contamination Control Systems & Solutions

3747 N. Booth Street
Phone: 414-962-5323

E-mail: cservice@esca-tech.com

Milwaukee, WI 53212

Fax: 414-962-7003

www.esca-tech.com